



## T8 Bypass/Line Voltage: 8' Double- Ended

### FEATURES

- Solid state replacement for high output 8' T8 and T12 fluorescent lamps
- Direct replacement of single-pin LED slimline with HO-equivalent lumen output
- Double-ended single contact base – same as T8 and T12 lamps
- Simple installation; bypass ballast, connect line voltage to single-pin sockets
- Frosted lens for uniform diffuse appearance
- No ballast or external driver required
- High Output: 3,500/5,500 lumens; 140/128lpw
- Instant-On with no warm up like fluorescents
- Integral 120~277V drivers provide easy installation
- Existing fixture maintains original UL compliance per UL1598C listing
- Does not operate on emergency backup
- **Not for use in airtight fixtures**

### WARRANTY

- 5 year limited warranty. Additional warranty options available. Contact EiKO for details

### APPLICATIONS

- Admin/Class/Conference/Meeting Rooms/Libraries
- Reception/Lobby
- Restrooms
- Hallways
- Stairwells
- Dining/Cafeteria
- Cold Storage
- Multi-Residential (Dorms/Apartments)
- Dr. Offices/Waiting/Patient Rooms
- Gyms & Athletic Facilities
- Production Areas
- Shipping/Receiving
- Warehouses
- Exterior Perimeter
- Parking Garage
- Parking Lot
- Pathway
- Athletic Fields
- Retail/Storefront

project name	type
catalog number	voltage
approved by	date

FA8









R17D




		24W	40W
<b>PERFORMANCE</b>	Power Consumption	24W	40W
	Lumens	3,500 lm	5,500 lm
	Efficacy (LPW)	146 lpw	138 lpw
	CRI	>80	
	Beam	210°	
	CCT	4000K; 5000K	
	Life (L70)	50,000 hours	
<b>ELECTRICAL</b>	Power Factor	≥0.9	
	Input Voltage	120-277V	
<b>CONSTRUCTION</b>	Operating Temperature	-4°F to 113°F (-20°C to 45°C)	
	Storage Temperature	-40°F to 113°F (-40°C to 45°C)	
	Lens	Glass	
	Base	FA8; R17D	
<b>LISTINGS</b>	Certification(s)	cULus Classified; FCC; NSF Listed	
	Material Usage	RoHS Compliant; no mercury	
	Environment	Suitable for Dry locations	



## PERFORMANCE SUMMARY

ORDER CODE	ITEM #		WATTS	LUMENS	LPW	CCT	CRI	MATERIAL	VOLTS	LIFE HOURS
12540	LED24WT8/96/840-FA8-G9D		24W	3,500	146	4000K	>80	Glass	120-277V	50,000
12541	LED24WT8/96/850-FA8-G9D		24W	3,500	146	5000K	>80	Glass	120-277V	50,000
12536	LED40WT8/96/840-FA8-G9D		40W	5,500	138	4000K	>80	Glass	120-277V	50,000
12537	LED40WT8/96/850-FA8-G9D		40W	5,500	138	5000K	>80	Glass	120-277V	50,000
12538	LED40WT8/96/840-R17D-G9D		40W	5,500	138	4000K	>80	Glass	120-277V	50,000
12539	LED40WT8/96/850-R17D-G9D		40W	5,500	138	5000K	>80	Glass	120-277V	50,000

## PRODUCT DIMENSIONS

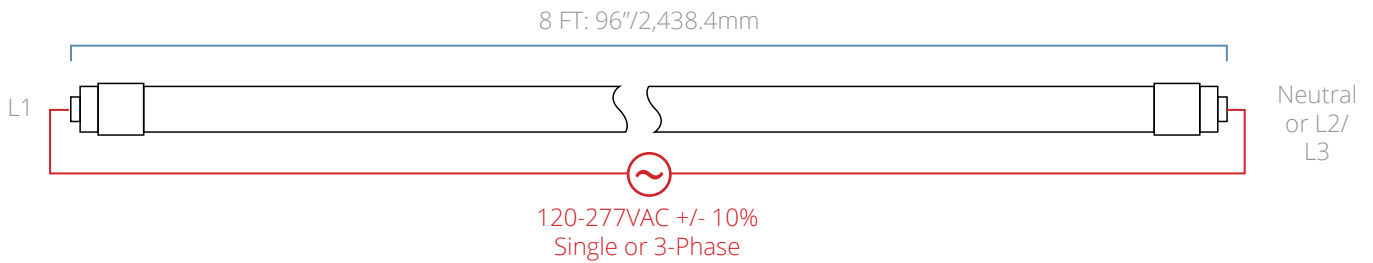

*On each side, socket must be shunted so both pins are connected.*



NSF offers the most accepted and trusted certification and verification programs for commercial foodservice equipment, specified by health departments, restaurant buyers and specifiers worldwide. NSF means market access – products with the NSF mark receive guaranteed regulatory acceptance in North America and improved acceptance worldwide. Verification programs, such as HACCP Compliance Verification - EU, demonstrate hygienic quality, independently verified by a trusted source.